

Single-phase choke, type TZS

series: TLH

Description:

SKYTL180-0,2 is a single-phase choke 200 uH, with current loading to 180A.




TECHNICAL PARAMETERS:

Nominal current In: 180A
 Inductance $\pm 20\%$ L: 200uH
 Protection class: IP00

Type	Nominal current [A]	Inductance $\pm 20\%$ [mH]	Weight [kg]	Conductor cross section [mm 2]	basic dimensions [mm]					
					A	B	C	D	E	F
					length	height	width	pitch	pitch	other
SKYTLH180-0,2mH	180	0,2	26	lug 95-10	320	223	256	291	100	-

* After a deal there is a possibility of modification of the filter construction according to the customer's request.

Dimensional drawing:

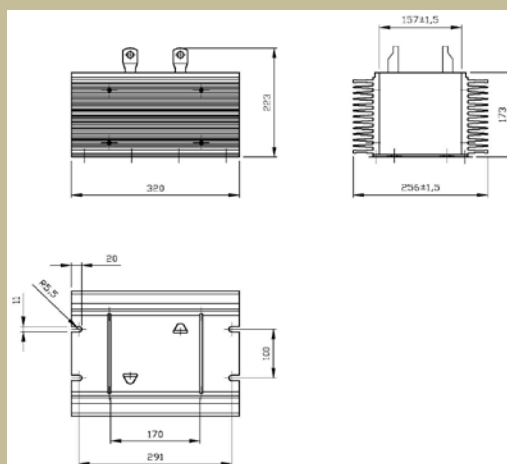

Use:

It is used for frequency converters in exacting surroundings with vibrations.

Dimensioning, wiring:

It is dimensioned according to the indicated label nominal voltage and current values. Short-circuit protection of the choke must not exceed nominal current value. When installing into switchboards it is necessary to count with power loss which depends on used application.