

U Mototechny 107 251 62 Tehovec Czech Republic Tel.: +420 323605511 +420 323660013 Fax: +420 323607922

http://www.skybergtech.com

E-mail: info@skybergtech.com

<u>Three-phase chokes type TZS</u> <u>řada XXPKT</u>

Description:


XXPKT series chokes are current compensated chokes.



TECHNICAL PARAMETERS:	
Rated current In:	20 A
Short-term current overload:	2x In
Degree of protection:	IP54

Туре	Rated	Inductance ± 20% [mH]		Connection cross section	Basic dimensions [mm]					
	current [A]			wires [mm 2]	Length	Height	Width	Pitch	Pitch	Other
SKY6PKT20	20	1	0,7	-	73	39,1	73	-	-	Ø 5,1

Dimensional drawing SKY6PKT20

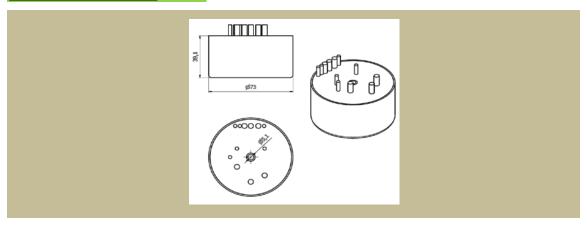

Dimensioning, connection:

It is dimensioned according to the given label nominal voltage and current values. The choke fuse must not exceed the rated current. When installing in switchboards, it is necessary to take into account the power dissipation, which depends on the application used.

Use:

For additional interference suppression of frequency inverters.

The manufacturer reserves the right to change product specifications and appearance without prior notice.