SKYBERGTECH

U Mototechny 107
251 62 Tehovec
Czech Republic

Tel.: +420 323605511
+420 323660013
Fax: +420 323607922

http://www.skybergtech.com
E-mail: info@skybergtech.com

DC chokes, type TZS
3TDC series

Description and functions:

3TDC series are DC chokes.

SKY3TDC250-0,1-20kHz

TECHNICAL PARAMETERS :

Extent of operating currents **In : 250 A**
Thermal class : F
Protection class : IP54

Type	Nominal current [A]	Nominal inbduktance [mH]	Weight [kg]	Conductor cross section [mm]	basic dimensions [mm]					
					A	B	C	D	E	H
					length	height	width	pitch	pitch	other
SKY3TDC250-0,1-20kHz	250	0,1	20	radox 16	240	159	155	-	-	-

* After a deal there is a possibility of modification of the filter construction according to the customer's request.

Dimensional drawing : SKY3TDC250-0,1-20kHz

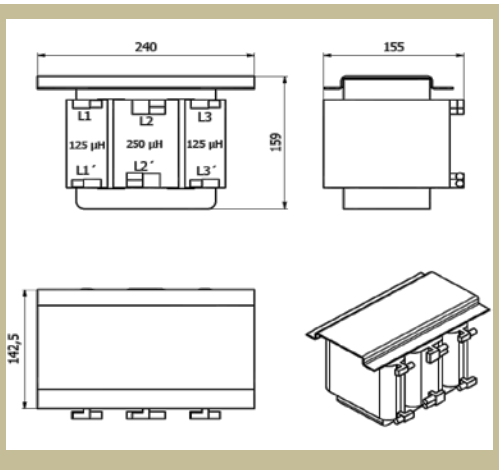

Dimensioning, wiring:

t is dimensioned according to the indicated label values. When installing into switchboards it is necessary to count with power loss of the filter and provide for removal of heat loss by help of a suitably placed ventilator.

Use:

They are supposed to be wired into the DC-links of the converters.

Výrobce si vyhrazuje právo na změnu specifikací a vzhledu produktů bez předchozího upozornění.